


Warranty [years]: 5

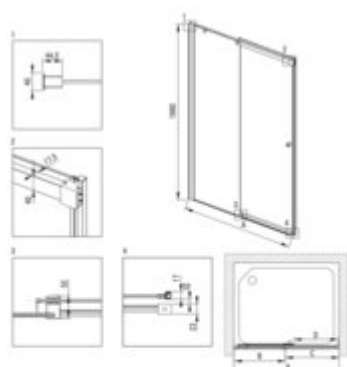

Model	Size [mm]	A [mm]	B [mm]	C [mm]	D [mm]	A+B+C+D [mm]	A+D, B+C [mm]
CTSP1-1P	1050x1050	985.1012	985.405	985	985	3940.912	1000.1026
CTSP1-1P	1150x1050	1085.1112	1035.405	985	985	4100.912	1100.1120
CTSP1-1P	1250x1050	1185.1212	1035.405	985	985	4300.912	1200.1220
CTSP1-1P	1350x1050	1285.1312	1035.405	985	985	4500.912	1300.1320
CTSP1-1P	1450x1050	1385.1412	1035.405	985	985	4700.912	1400.1420
CTSP1-1P	1550x1050	1485.1512	1035.405	985	985	4900.912	1500.1520
CTSP1-1P	1650x1050	1585.1612	1035.405	985	985	5100.912	1600.1620
CTSP1-1P	1750x1050	1685.1712	1035.405	985	985	5300.912	1700.1720
CTSP1-1P	1850x1050	1785.1812	1035.405	985	985	5500.912	1800.1820

Finish	nero
Width [mm]	1200
Height [mm]	2000
Glass finish	transparent
Glass thickness [mm]	6
Active cover	yes
installation	to be completed with KTS walk-in
Side dimension [mm]	1210
Masking of assembly elements	yes
Profiles levelling the curvature of the walls	yes
Tempered glass TOTAL WHITE	yes
Reversible doors	yes
Silent closing	yes
Installation without shower tray possible	yes
Possibility to cut the upper guide and threshold strip	yes

Finish	nero
Width [mm]	800
Height [mm]	2000
Glass finish	transparent
Glass thickness [mm]	6
Active cover	yes
installation	to be completed with KTS doors , to be completed with KTS walk-in , possibility of assembly with a KTS movable panel
Side dimension [mm]	770
Adjustment range from [mm]	700
Adjustment range up to [mm]	1200
Masking of assembly elements	yes
Profiles levelling the curvature of the walls	yes
Railings	adjustable stiffening the cabin
Tempered glass TOTAL WHITE	yes
Installation without shower tray possible	yes

installation	to be completed with KTS walk-in , to be completed with KTS doors , possibility of assembly with a KTS movable panel
--------------	--

- Active Cover coating
- Dedicated to Active Cover surfaces
- Covering of assembly elements