


KERRIA PLUS Shower doors

Product code: KTSUN43P
EAN: 5907650819974
Color: nero
Warranty [years]: 5

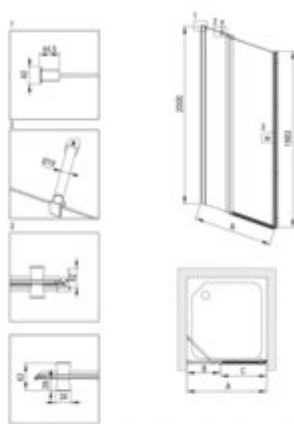

Model	Size [mm]	A [mm]	B [mm]	C [mm]	A+KICOPROD	A+KTE_KICD
KTSUN43P + KTE_N00X	800x2000	775-800	255-280	820	800-860	800-830
KTSUN43P + KTE_N00X	800x2000	875-900	355-380	920	900-960	900-930
KTSUN43P + KTE_N00X	1000x2000	975-1000	405-430	970	1000-1060	1000-1030
KTSUN43P + KTE_N00X	1100x2000	1075-1100	455-480	1020	1100-1160	1100-1130
KTSUN43P + KTE_N00X	1200x2000	1175-1200	505-530	1070	1200-1260	1200-1230

Shower door

Finish	nero
Width [mm]	1000
Height [mm]	2000
Glass finish	transparent
Glass thickness [mm]	6
Active cover	yes
installation	to be completed with KTS walk-in , to be completed with KTS doors
Railing length [mm]	420
Masking of assembly elements	yes
Profiles levelling the curvature of the walls	yes
rails	adjustable stiffening the cabin
Holders	with safety
Tempered glass TOTAL WHITE	yes
Reversible doors	yes
Silent closing	yes
Installation without shower tray	yes possible
Lifting hinges	yes
Hinges flush with the glass	no

Showe cabin

Side dimension [mm]	1000
---------------------	------

Features:

- Important! For recessed installation, be sure to buy the appropriate KTS_N00X or KTS_000X
- Active Cover coating
- TOTALWHITE transparent glass
- Profiles leveling the curvature of the walls
- Covering of assembly elements
- Possibility to install the cabin without a shower tray, directly on the tiles
- Dedicated cleaning agent, safe for cleaned surfaces
- Dedicated to Active Cover surfaces
- Reversible door that allows the cabin to be mounted on the right or left side
- The profile system makes it possible to reduce the curvature of the walls
- Hydrophobic Active-Cover coating that makes it easier for water to run off the glass
- Safe and durable tempered glass
- Only the best materials, the quality of which has been confirmed by laboratory tests
- Precise door closing through lifting hinges
- The railings give the structure rigidity
- Resistance to impacts, chemicals and stains in accordance with PN-EN 14428+A1:2008 norm, c